Elementoversikt 2025

keo

Ordering Information | Dimensional drawings

Ordering correctly

Necessary Order Information

Complete and accurate data is absolutely necessary for the
processing and production of your order, since an accurate and clear
order allows us to immediately begin processing your order without
time-consuming enquiries.

For this reason, your order must contain the following information:

• Range name and front number
• Handle number
• Drill pattern number
• Carcase colour number
• Plinth height and colour
  (if not specified, the standard plinth height of 150 mm will be supplied)
• Worktop design / décor
• Worktop edge design / edge colour
• Worktop sketch with dimensions and indication of tongue and
  groove joints
• Design of the worktop outer corner (for APD): square or round
• Upright / top shelf design including the colour number and
  upright thickness / Upright panel floor seal colour
• Shelf colours
• Glass design and / or colour
• Roll-up front colour
• Cornice profile / light pelmet profile including colour for each
• Order number and / or abbreviation
• Manufacturer information and built-in appliance model identification
• Kitchen block number (for kitchen block orders)
• Layout sketch with dimension information in 1:20 ratio
• Please draw / write any special productions in the centre of the
  layout sketch

Dimensional drawings for upright panels

Uprights at end of run for base units, sideboards and tall units are supplied as standard with an upright panel shoe.
The upright panel shoe is included in the price of the upright panel and is available in: 014 Stainless steel appearance, 010 Black.
If no colour is specified in the order, the version 014 Stainless steel appearance will automatically be supplied.
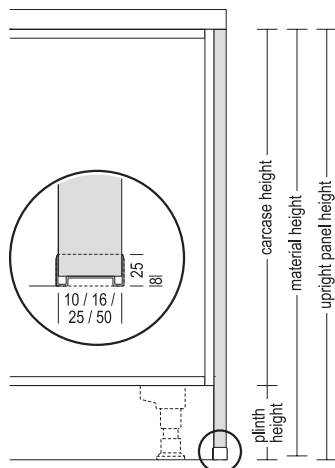

The height of the upright panel is reduced by the interior height dimensions of the profile and thus calculated as follows:

        carcase height
        + plinth height
   - 8 mm interior chamfering of the floor profile
        = material height

Base units

Carcase depth: 561 mm
Carcase height: 720 mm
Plinth height: 70, 100, 150 or 200 mm

Base units

Base unit
1 continuous door,
1 shelf

717

**UD** 20/30/40/45/50/60 cm

Base unit
1 pinned door,
1 shelf

141
573

U 20/30/40/45/50/60 cm

Base unit
2 continuous doors,
1 shelf

717

UD 80/90/100/120 cm

Base unit
2 pinned doors,
1 shelf

141
573

U 80/90/100/120 cm

**Base unit**
1 drawer,
1 door,
1 shelf

141
573

US 30/40/45/50/60 cm

Base unit
2 drawers,
2 doors,
1 shelf

141
573

US 80/90/100/120 cm

Base unit
1 drawer,
2 doors,
1 shelf

141
573

USG 80/90/100/120 cm

Pull-out unit
2 pull-outs,
1 internal drawer

357
357

UI2DA 30/40/45/50/60/80/90/100/120 cm

Pull-out unit
1 drawer,
2 pull-outs

141
285
285

UA 30/40/45/50/60/80/90/100/120 cm

Pull-out unit
2 drawers,
1 pull-out

177
177
357

UD2SA 50/60/80/90/100/120 cm

Drawer unit
3 drawers,
1 pull-out

141
141
141
285

**U3SA** 30/40/45/50/60/80/90/100/120 cm

Base units

Pull-out unit
1 pull-out,
1 continuous front,
2 metal boxes with
non-slip mats

717

UAMD 20/30 cm

Open shelf base unit
2 fixed shelves,
side depth: 582 mm

UR 15/20/30/40/45/50/60 cm

Corner base units

Corner base unit
2 continuous doors,
opening angle: 165°,
1 shelf

717

UDTE 80/90 cm

Corner base unit
2 pinned doors,
opening angle: 165°,
1 shelf

141
573

UTE 80/90 cm

Corner base unit as carousel unit
2 continuous fronts,
carcase height: 750 mm,
1 revolving carousel with
2 wooden shelves and
metal railing, rotates 360°,
height adjustable top shelf

717

UEDK 80/90 cm

Corner base unit as carousel unit
2 pinned fronts,
carcase height: 750 mm,
1 revolving carousel with
2 wooden shelves and
metal railing, rotates 360°,
height adjustable top shelf

141
573

UEK 80/90 cm

**Chamfered corner base unit**
1 continuous door,
1 shelf

717

UED 80/90 cm

Chamfered corner base unit
1 pinned door,
1 shelf

141
573

UE 80/90 cm

Half corner base units

Corner base unit
1 continuous door,
1 shelf,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-40: ... 1050 (1030 - 1150) mm
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

717

UED90-40
UED90-45
UED100-50
UED100-60

Corner base unit
1 drawer,
1 door,
1 shelf,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-40: ... 1050 (1030 - 1150) mm
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

141
573

UE90-40
UE90-45
UE100-50
UE100-60

Corner unit with swivel pull-out
1 continuous door,
2 tablar shelves
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

717

UEDSA90-45
UEDSA100-50
UEDSA100-60

Corner unit with swivel pull-out
1 drawer,
1 door,
2 wooden swivel tablars
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

141
573

UESA90-45
UESA100-50
UESA100-60

Corner unit with swivel pull-out
1 pinned door,
2 tablar shelves
with metal railing,
height adjustable,
1 angle filler
Carcase widths: 900, 1000 mm
Planning dimensions (variable):
650 (630 - 750) x ...
*90-45: ... 1100 (1080 - 1200) mm
*100-50: ... 1150 (1130 - 1250) mm
*100-60: ... 1250 (1230 - 1350) mm

141
573

**UESAV90-45**
UESAV100-50
UESAV100-60

Surcharge for recessed fillers
on fillers and half corner
units, side panel made of
carcase material,
in carcase height
incl. 2 plinth feet for
on-site assembly,
carcase depth: 561 mm

560

MP-GS

Base units

Carcase depth: 561 mm
Carcase height: 720 mm
Plinth height: 70, 100, 150 oder 200 mm

Angle fillers

717

UPE
UPE-V

Angle filler
Continuous front material,
70 x 70 mm, planning
dimensions: 650 x 650 mm

as above, however **variable**
from 50 to 170 mm, planning
dimensions: 630 - 750 mm
1st dimension = left /
2nd dimension = right

560

MP-GS

**Surcharge for
recessed fillers**
on fillers and half corner
units, side panel made of
carcase material,
in carcase height
incl. 2 plinth feet for
on-site assembly,
carcase depth: 561 mm

Fillers / Panelling

UPK 10/20 cm

Filler
Carcase material,
720 mm high,
U-shaped seal for
connection to wall,
width: 100 / 200 mm

717

UPD 20 cm

Front filler
Continuous front material,
width: 200 mm

RK-72

Base unit back panel
16 mm thick,
720 mm high,
width: 250 - 2000 mm,
available in all carcase and
worktop décors from décor
group 1,
Vario clip fastening,
in case of reproduction
finishes vertical wood grain

RKS-72

as above, however,
continuous height,
including floor profile:
70 mm plinth height:
810 mm
100 mm plinth height:
840 mm
150 mm plinth height:
890 mm
200 mm plinth height:
940 mm

**Available floor profile
colours:**
010 Black
014 Stainless steel
appearance

717

RFD-72
30/40/45/50/60/80/90 cm

Base unit back panel
1 continuous front design,
720 mm high,
Vario clip fastening,
without drill hole

Cooker housing

112

HU 60 cm

Cooker housing
1 fixed panel,
side sections: 202 mm deep,
aperture dimension: 591 mm

112

**HUB** 60 cm

Cooker housing
1 fixed panel,
aperture dimension: 598 mm

112

HUS 60 cm

Cooker housing
1 plastic drawer,
16 l capacity,
interior dimensions:
485 x 480 x 68 mm,
aperture dimension: 598 mm

112

HUG 60 cm

Cooker housing
1 large-capacity drawer with
second level for baking trays,
plastic, 30 l capacity,
interior dimensions:
480 x 380 x 150 mm,
aperture dimension: 598 mm

Hot plate units

717

KD60 60 cm

Hot plate unit
1 internal panel,
1 construction shelf for
heat insulation,
1 door,
1 shelf

141
573

K60 60 cm

Hot plate unit
1 fixed panel,
1 construction shelf for
heat insulation,
1 door,
1 shelf

141
573

KS60 60 cm

Hot plate unit
1 drawer,
1 spacer shelf for hot plate,
1 door,
1 shelf

141
285
285

KS2A
60/80/90/100/120 cm

Hot plate unit
1 drawer,
1 spacer shelf for hot plate,
2 pull-outs

357
357

KD2A
60/80/90/100/120 cm

Hot plate unit
1 internal panel,
1 construction shelf for heat
insulation,
2 pull-outs

Sink units

717

SPUD 40/45/50/60 cm

Sink base unit
1 internal panel,
1 continuous door

141
573

SPU 40/45/50/60 cm

Sink base unit
1 fixed panel,
1 door

717

SPUD 80/90/100/120 cm

Sink base unit
2 internal panels,
2 continuous doors

141
573

SPU 80/90/100/120 cm

Sink base unit
2 fixed panels,
2 doors

717

SPUAD
40/45/50/60 cm

Sink base unit
1 internal panel,
1 continuous front with
centred handle,
underline without pull-out rails and
drill holes

141
573

SPUA 40/45/50/60 cm

Sink base unit
1 fixed panel,
1 front with centred handle,
underline without pull-out rails and
drill holes

717

SPUDA-ASK
45/50/60 cm

18L

8L   8L

450/500/600

**Sink base unit
Separato-K**
1 internal panel,
1 pull-out, 500 mm deep, with
**waste separation system
Separato-K**
with pull-out lid,
1 x 18 and 2 x 8 litres,
500 mm width: with
1 side organiser,
600 mm width: with
2 side organisers,
1 bio lid (for all widths)

Doors for integrated appliances

573

GSB 45/60 cm

Door
for integrated
dishwashers,
without handle

717

GSBD*-I 45/60 cm

Continuous door
for fully integrated
dishwashers,
built-under fridge and
freezer units
with pull-outs

141
573

GSB*-I 45/60 cm

Pinned door
for fully integrated
dishwashers,
built-under fridge and
freezer units
with pull-outs

Base units in XL height

Carcase depth: 561 mm
Carcase height: 792 mm
Plinth height: 70, 100, 150 or 200 mm

XL

XL Base units

789	**XL Base unit** 1 continuous door, 2 shelves **UD*-X** 20/30/40/45/50/60 cm
141 645	**XL Base unit** 1 pinned door, 2 shelves **U*-X** 20/30/40/45/50/60 cm
789	**XL Base unit** 2 continuous doors, 2 shelves **UD*-X** 80/90/100/120 cm
141 645	**XL Base unit** 2 pinned doors, 2 shelves **U*-X** 80/90/100/120 cm
141 645	**XL Base unit** 1 drawer, 1 door, 1 shelf **US*-X** 30/40/45/50/60 cm
141 645	**XL Base unit** 2 drawers, 2 doors, 1 shelf **US*-X** 80/90/100/120 cm
141 645	**XL Base unit** 1 drawer, 2 doors, 1 shelf **USG*-X** 80/90/100/120 cm
357 429	**Pull-out unit** 2 pull-outs, 1 internal drawer **UI2DA*-X** 30/40/45/50/60/80/90/100/120
141 285 357	**XL Pull-out unit** 1 drawer, 2 pull-outs **UA*-X** 30/40/45/50/60/80/90/100/120 cm
177 177 429	**Pull-out unit** 2 drawers, 1 pull-out **UD2SA*-X** 80/90/100/120 cm cm
141 141 141 357	**XL Drawer unit** 3 drawers, 1 pull-out **U3SA*-X** 30/40/45/50/60/80/90/100/120 cm

XL Base units

789	**XL Pull-out unit** 1 pull-out, 1 continuous front, 2 metal boxes with non-slip mats **UAMD*-X** 20/30 cm
	XL Open shelf base unit 2 fixed shelves, side depth: 582 mm **UR*-X** 15/20/30/40/45/50/60 cm

XL Corner base units

|	
789	**XL Corner base unit** 2 continuous doors, opening angle: 165°, 2 shelves **UDTE*-X** 80/90 cm
141 645	**XL Corner base unit** 2 pinned doors, opening angle: 165°, 2 shelves **UTE*-X** 80/90 cm
789	**XL Corner base unit as carousel unit** 2 continuous fronts, Unit height: 822 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf **UEDK*-X** 80/90 cm
141 645	**XL Corner base unit as carousel unit** 2 pinned fronts, Unit height: 822 mm, 1 revolving carousel with 2 wooden shelves and metal railing, rotates 360° height adjustable top shelf **UEK*-X** 80/90 cm
789	**XL Chamfered corner base unit** 1 continuous door, 2 shelves **UED*-X** 80/90 cm
141 645	**XL Chamfered corner base unit** 1 pinned door, 2 shelves **UE*-X** 80/90 cm

XL Half-corner units

789	**XL Corner base unit** 1 continuous door, 2 shelves, 1 angle filler Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ... *90-40: ... 1050 (1030 - 1150) mm *90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm **UED90-40-X UED90-45-X UED100-50-X UED100-60-X**
141 645	**XL Corner base unit** 1 drawer, 1 door, 1 shelf, 1 angle filler Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ... *90-40: ... 1050 (1030 - 1150) mm *90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm **UE90-40-X UE90-45-X UE100-50-X UE100-60-X**
789	**XL Corner unit with swivel pull-out** 1 continuous door, 2 wooden swivel tablars with metal railing, height adjustable, 1 angle filler Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ... *90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm **UEDSA90-45-X UEDSA100-50-X UEDSA100-60-X**
141 645	**XL Corner unit with swivel pull-out** 1 drawer, 1 door, 2 wooden swivel tablars with metal railing, height adjustable, 1 angle filler Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ... *90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm **UESA90-45-X UESA100-50-X UESA100-60-X**
141 645	**XL Corner unit with swivel pull-out** 1 pinned door, 2 wooden swivel tablars with metal railing, height adjustable, 1 angle filler Carcase widths: 900, 1000 mm Planning dimensions (variable): 650 (630 - 750) x ... *90-45: ... 1100 (1080 - 1200) mm *100-50: ... 1150 (1130 - 1250) mm *100-60: ... 1250 (1230 - 1350) mm **UESAV90-45-X UESAV100-50-X UESAV100-60-X**
560	**Surcharge for recessed fillers** on fillers and half corner units, side panel made of carcase material, in carcase height incl. 2 plinth feet for on-site assembly, carcase depth: 561 mm **MP-GS**

5

Base units in XL height

Carcase depth: 561 mm
Carcase height: 792 mm
Plinth height: 70, 100, 150 or 200 mm

XL

XL Angle fillers

XL Angle filler
Continuous front material,
70 x 70 mm, Planning
dimensions: 650 x 650 mm

789

UPE-X
UPE-V-X

as above, however **variable
from** 50 to 170 mm, Planning
dimensions: 630 - 750 mm
1st dimension = left
2nd dimension = right

**Surcharge for
recessed fillers**
on fillers and half corner
units, side panel made of
carcase material,
in carcase height
incl. 2 plinth feet for
on-site assembly,
carcase depth: 561 mm

560

MP-GS

XL Fillers / Panelling

XL Filler
Carcase material,
792 mm high,
U-shaped seal for
connection to wall,
width: 100 / 200 mm

UPK*-X 10/20 cm

XL Front filler
Continuous front material,
width: 200 mm

789

UPD*-X 20 cm

XL Base unit back panel
16 mm thick,
792 mm high,
width: 250 - 2000 mm,
available in all carcase and
worktop décors from décor
group 1,
Vario clip fastening,
in case of reproduction
finishes vertical wood grain

792

RK-79

as above, however,
continuous height,
including floor profile:
70 mm plinth height:
882 mm
100 mm plinth height:
912 mm
150 mm plinth height:
962 mm
200 mm plinth height:
1012 mm

RKS-79

**Available floor profile
colours:**
010 Black
014 Stainless steel
appearance

XL Base unit back panel
1 continuous front,
789 mm high,
Vario clip fastening,
without drill holes

789

RFD*-79
30/40/45/50/60 cm

XL Cooker housings

XL Cooker housing
1 fixed panel,
aperture dimension: 595 mm

187

HUB-X 60 cm

XL Cooker housing
1 plastic drawer,
16 l capacity,
interior dimensions:
485 x 480 x 68 mm
aperture dimension: 595 mm

187

HUS*-X 60 cm

XL Cooker housing
1 large-capacity drawer
with second level for baking
trays, plastic, 30 l capacity,
interior dimensions:
480 x 380 x 150 mm,
aperture dimension: 595 mm

187

HUG-X 60 cm

XL Hot plate units

XL Hot plate unit
1 internal panel,
1 construction shelf for heat
insulation,
1 door,
2 shelves

789

KD60-X 60 cm

XL Hot plate unit
1 fixed panel,
1 construction shelf for heat
insulation,
1 door,
1 shelf

141

645

K60-X 60 cm

XL Hot plate unit
1 drawer,
1 spacer shelf for hot plate,
1 door,
1 shelf

141

645

KS60-X 60 cm

XL Hot plate unit
1 drawer,
1 spacer shelf for hot plate,
2 pull-outs

141

285

357

KS2A*-X
60/80/90/100/120 cm

XL Hot plate unit
1 internal panel,
1 construction shelf
for heat insulation,
2 pull-outs

357

429

KD2A*-X
60/80/90/100/120 cm

XL-Doors for integrated appliances

Continuous XL door
for fully integrated
dishwashers,
built-under fridge and
freezer units
with pull-outs,
includes spacer strip

789

GSBD*-I-X 45/60 cm

Pinned XL door
for fully integrated
dishwashers,
built-under fridge and
freezer units
with pull-outs,
includes spacer strip

141

645

GSB*-I-X 45/60 cm

XL Sink base units

XL Sink base unit
1 internal panel,
1 continuous door

789

SPUD*-X 40/45/50/60 cm

XL Sink base unit
1 fixed panel,
1 door

141

645

SPU*-X 40/45/50/60 cm

XL Sink base unit
2 internal panels,
2 continuous doors

789

SPUD*-X 80/90/100/120 cm

XL Sink base unit
2 fixed panels,
2 doors

141

645

SPU*-X 80/90/100/120 cm

XL Sink base unit
1 internal panel,
1 continuous front with
centred handle,
without pull-out rails and
drill holes

789

SPUAD*-X
40/45/50/60 cm

XL Sink base unit
1 fixed panel,
1 front with centred handle,
without pull-out rails and
drill holes

141

645

SPUA*-X 40/45/50/60 cm

XL Sink unit Separato-K
1 internal panel,
1 pull-out, 500 mm deep, with
**waste separation system
Separato-K**
with pull-out lid,
1 x 18 and 2 x 8 litres,
500 mm width: with
1 side organiser,
600 mm width: with
2 side organisers,
1 bio lid (for all widths)

789

SPUDA-ASK*-X
45/50/60 cm

18L

8L   8L

450/500/600

Worktops | Niche cladding

Worktops

Worktop APN with N-edge
rounded front edge, sides sealed with straight décor edge.
Price per running 100 mm, every 100 mm started will be invoiced.
Max. length:
Décor group 1: 5100 mm,
Décor group 2
(Xtra décors): 4000 mm
Please quote the décor number in your order.

APN
60/70/80/90/100/
110/120 cm

Worktop APD with décor edge
front and side edges coated with straight décor edging material, 1.5 mm thick.
Price per running 100 mm, every 100 mm started will be invoiced.
Max. length:
Décor group 1: 5100 mm,
Décor group 2
(Xtra décors): 4000 mm
Please quote the décor and edge colour number in your order.

APD
60/70/80/90/100/
110/117 cm

Worktop processing

AP-R
Surcharge for exterior and interior roundings deviating from the standard radii

APN-A
APN-AS
APD-A
Surcharge for chamfered cuts
on worktops and tables, including edging

AP-NF
Tongue and groove joint
for worktop corners or extensions,
incl. screw fittings, tongues and water resistant glue

o. Abb.
AP-AUS
Cut-outs for built in hobs, sinks or ventilation grills

AP-IEK
Surcharge for inner corners in square design
on worktops and tables with décor edge

Niche cladding

NV 54
NV 70

Niche cladding
coated on both faces, 16 mm thick,
horizontal structure (except 274 Teramo marble reproduction)
with edge on all sides, width: 250 - 2580 mm
heights:
NV54 for niches beneath wall units
NV70 for niches beneath cooker hoods

Price per started 100 mm.

NV 203

Niche cladding as above,
however with deviating dimensions acc. to sketch
max. 2580 mm wide, 2030 mm high,
1st dimension in direction of grain
coated edge all round.
Minimum price: 0.5 m²,
minimum dimensions: 250 x 200 mm,
invoiced per m².

Accessories for niche cladding

NPUK 500
Plastic cover profile in translucent appearance
for niche or back panel cladding,
16 mm thick, self-adhesive, 5000 mm long

WAPN
200/400/500 cm
Upstands for continuous planning with niche cladding
2-piece plastic profile with sealing lip,
incl. vertical sealing profile dimensions: 25 mm high, 25 mm deep,
delivered as strand material.

Available in:
014 Stainless steel appearance, 010 Black

WAPN-Z
WAPN accessory bag
matches the plastic upstands WAPN
<u>consisting of:</u>
4 x interior corner 90° /
2 x interior corner 135°
2 x exterior corner 90°
2 x set of end caps for WAPN
2 x set of end caps for niche cladding

Available in:
014 Stainless steel appearance, 010 Black

NKPU 200 / 400
Niche profile on bottom
Aluminium profile, 2-piece with sealing profile
for niche and back panel cladding or as upstand,
dimensions:
17 mm high, 20 mm deep

Available in:
014 Stainless steel appearance, 010 Black

NKPO 200 / 400
Niche profile on top aluminium profile, stainless steel appearance
for niche cladding incl. 1 set of end caps (left / right),
dimensions:
16 mm high, 16 mm deep

NKP-Z
NKP accessory bag
matches upstand NKPU

Available in:
014 Stainless steel appearance, 010 Black

NKP-EK
1 set of end caps
matching aluminium profile for niche cladding NKPO

Upright panels | Top shelves | Wall shelf units

Upright panels for base units

Upright at end of run
incl. floor profile in 014 Stainless steel appearance or 010 Black,
depth: 583 mm

UWA 10/16/25/50 mm

Plinth height 70 mm: 790 mm
Plinth height 100 mm: 820 mm
Plinth height 150 mm: 870 mm
Plinth height 200 mm: 920 mm

Upright for room designs
depth: 250 to 1166 mm,
edged on both sides,
incl. floor profile in 014 Stainless steel appearance or 010 Black

UWR 10/16/25/50 mm

Plinth height 70 mm: 790 mm
Plinth height 100 mm: 820 mm
Plinth height 150 mm: 870 mm
Plinth height 200 mm: 920 mm

XL Upright panels for base units

XL Upright at end of run
incl. floor seal in 014 Stainless steel appearance or 010 Black,
depth: 583 mm

UWA*-X 10/16/25/50 mm

Plinth height 70 mm: 862 mm
Plinth height 100 mm: 892 mm
Plinth height 150 mm: 942 mm
Plinth height 200 mm: 992 mm

XL Upright for room designs
depth: 250 to 1166 mm,
edged on both sides,
incl. floor seal in 014 Stainless steel appearance or 010 Black

UWR*-X 10/16/25/50 mm

Plinth height 70 mm: 862 mm
Plinth height 100 mm: 892 mm
Plinth height 150 mm: 942 mm
Plinth height 200 mm: 992 mm

Wall shelf units

Plug-in wall shelf, 25 mm thick
Carcase material, polymer edging all around, 255 mm deep, incl. metal plug fitting

WB25 30/40/45/50/55/60/65/70/80/90/100/110/120 cm

Wall shelf unit with shelf holders, 16 mm thick
255 mm deep, polymer edging all round, **available in widths from 250 mm to 1000 mm,** includes 2 shelf holders VBH5

VB16 100 cm

Wall shelf unit with shelf holders as above, **however available in widths from 1001 mm to 2580 mm,** includes 4 shelf holders VBH5

VB16 258 cm

Available shelf holder colours:
010 Black
014 Stainless steel appearance

Wall shelf unit with shelf holders, 25 mm thick
255 mm deep, polymer edging all round, **available in widths from 250 mm to 1000 mm,** includes 2 shelf holders VBH5

VB25 100 cm

Wall shelf unit with shelf holders as above, **however available in widths from 1001 mm to 2580 mm,** includes 4 shelf holders VBH5

VB25 258 cm

Available shelf holder colours:
010 Black
014 Stainless steel appearance

Wall shelf unit with shelf holders, 50 mm thick
255 mm deep, polymer edging all round, **available in widths from 250 mm to 1000 mm,** includes 2 shelf holders VBH5

VB50 100 cm

Wall shelf unit with shelf holders as above, **however available in widths from 1001 mm to 2580 mm,** includes 4 shelf holders VBH5

VB50 258 cm

Available shelf holder colours:
010 Black
014 Stainless steel appearance

Upright panels for wall units

Upright at end of run / intermediate upright for wall units, height 360 mm
depth: 372 mm,
height: 360 mm

WW 10/16/25/50 mm **-36**

Upright at end of run / intermediate upright for wall units, height 576 mm
depth: 372 mm,
height: 576 mm

WW 10/16/25/50 mm **-58**

Upright at end of run / intermediate upright for wall units, height 1
depth: 372 mm,
height: 720 mm

WW 10/16/25/50 mm **-1**

Upright at end of run / intermediate upright for wall units, height 2
depth: 372 mm,
height: 792 mm

WW 10/16/25/50 mm **-2**

Upright at end of run / intermediate upright for wall units, height 3
depth: 372 mm,
height: 864 mm

WW 10/16/25/50 mm **-3**

Top shelves

Top shelf, 10 mm thick, for side- or highboard
coated on both faces, polymer edged on front and sides,
length: 250 - 2580 mm

ADB10 38/59/117 cm

Top shelf, 16 mm thick, for side- or highboard
coated on both faces, polymer edged on front and sides,
length: 250 - 2580 mm

ADB16 38/59/117 cm

Top shelf, 25 mm thick, for side- or highboard
coated on both faces, polymer edged on front and sides,
length: 250 - 2580 mm

ADB25 38/59/117 cm

Top shelf, 50 mm thick, for side- or highboard
coated on both faces, polymer edged on front and sides,
length: 250 - 2580 mm

ADB50 38/59/117 cm

Highboards – 1582 / 1612 / 1662 / 1712 mm high

Carcase depth: 561 mm
Carcase height: 1512 mm
Plinth height: 70, 100, 150 oder 200 mm

Highboards

Highboard
2 doors,
1 fixed shelf,
3 shelves

933
573

H 30/40/50/60 cm

Housing for ovens

Oven housing
aperture height: 590 mm
1 fixed compensation panel,
1 drawer,
1 pinned door,
1 shelf

VAR
141
141
573

GOS

Integrated appliance housings with aperture height up to 880 mm

Appliance housing for
integrated fridge
aperture height: 880 mm
1 appliance door,
2 pull-outs

933
285
285

G88A

Integrated appliance housings with aperture height up to 1230 mm

Appliance housing for
integrated fridge
aperture height: 1230 mm
1 internal panel,
1 appliance door,
1 drawer

1293
213

G123S

Appliance housings with aperture height up to 1450 mm

Appliance housing for
integrated fridge / freezer
aperture height: 1450 mm
1 internal panel,
2 appliance doors

933
573

G145

Fillers

Filler
Carcase material,
1512 mm high,
U-shaped seal for
connection to wall,
width: 230 mm

1512

HPK 20 cm

XL Highboards – 1654 / 1684 / 1734 / 1784 mm high

Carcase depth: 561 mm
Carcase height: 1584 mm
Plinth height: 70, 100, 150 oder 200 mm

XL Highboards

XL Highboard
2 doors,
1 fixed shelf,
3 shelves

933
645

H*-X 30/40/50/60 cm

XL Housing for ovens

XL Oven housing
aperture height: 590 mm
1 fixed compensation panel,
1 drawer,
1 door,
2 shelves

VAR
141
789

GDOS-X

XL Integrated appliance housings with aperture height up to 880 mm

XL Appliance housing for
integrated fridge
aperture height: 880 mm
1 appliance door,
2 pull-outs

933
285
357

G88A-X

XL Integrated appliance housings with aperture height up to 1230 mm

XL Appliance housing for
integrated fridge
aperture height: 1230 mm
1 internal panel,
1 appliance door,
1 pull-out

1293
285

G123A-X

XL Appliance housings with aperture height up to 1450 mm

XL Appliance housing for
integrated fridge / freezer
aperture height: 1450 mm
2 appliance doors

933
645

G145-X

XL Fillers

XL Filler
Carcase material,
1584 mm high,
U-shaped seal for
connection to wall,
width: 230 mm

1584

HPK20-X 20 cm

Tall units, height 1 – 2086 / 2116 / 2166 / 2216 mm high

Carcase depth: 561 mm
Carcase height: 2016 mm
Plinth height: 70, 100, 150 oder 200 mm

Tall units	Appliance housing for ovens, microwaves, steam cookers, compact appliances	Appliance housings with aperture height up to 880 mm

Tall units

501
933
573

Pantry unit
3 doors,
2 fixed shelves,
4 shelves

H*-1 30/40/50/60 cm

1293
717

Pantry unit
2 doors,
1 fixed shelf,
4 shelves

HDV*-1 30/40/50/60 cm

501
933
573

Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
5 hanging baskets with wooden bottoms and metal railing, adjustable

HA*-1 30/40 cm

1293
717

Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
5 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-1 30/40 cm

501
933
573

Broom cupboard
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
1 system grid,
2 baskets for cleaning materials,
1 system shelf,
1 hose rack for vacuum cleaner,
2 pegboards

HB*-1 40/50/60 cm

501
933
573

Tall unit
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
5 internal pull-outs

HI*-1 40/50/60 cm

Appliance housing for ovens, microwaves, steam cookers, compact appliances

645 VAR
717

Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
2 shelves

GO-1

645 VAR
141
573

Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 drawer,
2 shelves

GOS-1

645 VAR
141
285
285

Oven housing
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 drawer,
2 pull-outs

GOS2A-1

357 VAR
573

Appliance housing for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 shelf

GMO-1

573 VAR
357

Appliance housing for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 pull-out

GMOA-1

357
429 VAR
573

Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
1 flap,
1 lifting door,
1 fixed compensation panel,
1 door,
1 shelf

GLO-1

357
429 VAR
285
285

Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
1 flap,
1 lifting door,
1 fixed compensation panel,
2 pull-outs

GLO2A-1

Appliance housings with aperture height up to 880 mm

501
933
573

Appliance housing for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves

G88-1

357
933
717

Appliance housing for integrated fridge
aperture height: 880 mm
1 flap,
1 appliance door,
1 door,
1 shelf

GD88-1

501
933
285
285

Appliance housing for integrated fridge
aperture height: 880 mm
1 door,
1 shelf,
1 appliance door,
2 pull-outs

G88A-1

Appliance housings with aperture height up to 1230 mm

1437
573

Appliance housing for integrated fridge
aperture height: 1230 mm
1 appliance door,
1 door,
1 shelf

G123-1

429
1293
285

Appliance housing for integrated fridge
aperture height: 1230 mm
1 door,
1 internal panel,
1 appliance door,
1 pull-out

G123A-1

645
429
933

Appliance housing for integrated fridge / freezer
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel,
1 appliance door for freezer compartment,
1 appliance door for fridge section

G123G-1

Tall units, height 1 – 2086 / 2116 / 2166 / 2216 mm high

Carcase depth: 561 mm
Carcase height: 2016 mm
Plinth height: 70, 100, 150 oder 200 mm

Appliance housings with aperture height up to 1450 mm

573 / 1149 / 285 **G145A-1**	**Appliance housing for integrated fridge / freezer aperture height: 1450 mm** 1 appliance door for freezer compartment, 1 appliance door for fridge section, 1 pull-out
501 / 933 / 573 **G145-1**	**Appliance housing for integrated fridge / freezer aperture height: 1450 mm** 1 door, 1 shelf, 1 internal panel, 2 appliance doors

Appliance housings with aperture height between 1580 - 1940 mm

1293 / 717 **GD194-1**	**Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm** 2 appliance doors

Fillers / Cladding

2016 **HPK20-1** 20 cm	**Filler** Carcase material, 2016 mm high, U-shaped seal for connection to wall, width: 230 mm
2013 **HPD20-1** 20 cm	**Front filler** Continuous front material, width: 200 mm

Tall units in XL height, height 1 XL – 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm
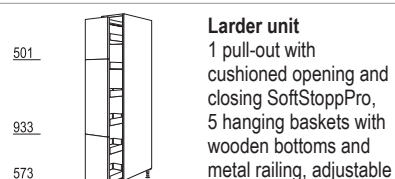Carcase height: 2088 mm
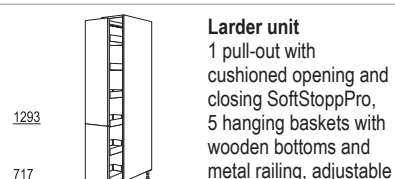Plinth height: 70, 100, 150 oder 200 mm

XL Tall units

XL Pantry unit
3 doors,
2 fixed shelves,
4 shelves

501 / 933 / 645

H*-1X 30/40/50/60 cm

XL Pantry unit
2 doors,
1 fixed shelf,
5 shelves

1293 / 789

HDV*-1X 30/40/50/60 cm

XL Larder unit
1 pull-out with
cushioned opening and
closing SoftStoppPro,
6 hanging baskets with
wooden bottoms and
metal railing, adjustable

501 / 933 / 645

HA*-1X 30/40 cm

XL Larder unit
1 pull-out with
cushioned opening and
closing SoftStoppPro,
6 hanging baskets with
wooden bottoms and
metal railing, adjustable

1293 / 789

HDA*-1X 30/40 cm

XL Broom cupboard
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
1 system grid,
2 baskets for cleaning
materials,
1 system shelf,
1 hose rack for vacuum
cleaner,
2 pegboards

501 / 933 / 645

HB*-1X 40/50/60 cm

XL Tall unit
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
5 internal pull-outs

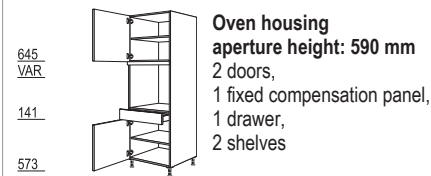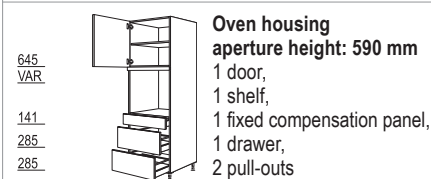501 / 933 / 645

HI*-1X 40/50/60 cm

XL Appliance housing for ovens, micro-waves, steam cookers, compact appliances

XL Oven housing
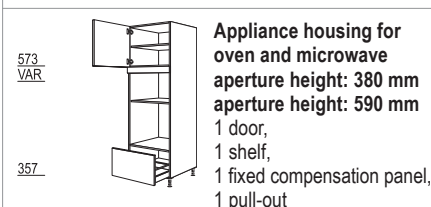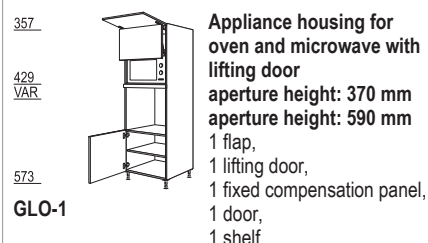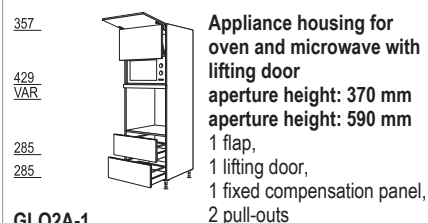**aperture height: 590 mm**
2 doors,
1 fixed compensation panel,
3 shelves

645 VAR / 789

GO-1X

XL Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 drawer,
2 shelves

645 VAR / 141 / 645

GOS-1X

XL Oven housing
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 drawer,
2 pull-outs

645 VAR / 141 / 285 / 357

GOS2A-1X

XL Appliance housing for
oven and microwave
aperture height: 380 mm
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 shelf

357 VAR / 645

GMO-1X

XL Appliance housing for
oven and microwave
aperture height: 380 mm
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 pull-out

573 VAR / 429

GMOA-1X

XL Appliance housing for
oven and microwave with
lifting door
aperture height: 370 mm
aperture height: 590 mm
1 flap,
1 lifting door,
1 fixed compensation panel,
1 door,
1 shelf

357 / 429 VAR / 645

GLO-1X

XL Appliance housing for
oven and microwave with
lifting door
aperture height: 370 mm
aperture height: 590 mm
1 flap,
1 lifting door,
1 fixed compensation panel,
2 pull-outs

357 / 429 VAR / 285 / 357

GLO2A-1X

XL Appliance housings with aperture height up to 880 mm

XL Appliance housing
for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves

501 / 933 / 645

G88-1X

XL Appliance housing
for integrated fridge
aperture height: 880 mm
1 flap,
1 appliance door,
1 door,
2 shelves

357 / 933 / 789

GD88-1X

XL Appliance housing
for integrated fridge
aperture height: 880 mm
1 door,
1 shelf,
1 appliance door,
2 pull-outs

501 / 933 / 285 / 357

G88A-1X

XL Appliance housings with aperture height up to 1230 mm

XL Appliance housing
for integrated fridge
aperture height: 1230 mm
1 appliance door,
1 door,
1 shelf

1437 / 645

G123-1X

XL Appliance housing
for integrated fridge
aperture height: 1230 mm
1 door,
1 internal panel,
1 appliance door,
1 pull-out

429 / 1293 / 357

G123A-1X

XL Appliance housing for
integrated fridge / freezer
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel,
1 appliance door for
freezer compartment,
1 appliance door for
fridge section

645 / 429 / 1005

G123G-1X

Tall units in XL height, height 1 XL – 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm
Carcase height: 2088 mm
Plinth height: 70, 100, 150 oder 200 mm

XL Appliance housings with aperture height up to 1450 mm

|	
501 933 645 **G145-1X**	**XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm** 1 door, 1 shelf, 1 internal panel, 2 appliance doors
573 1149 357 **G145A-1X**	**XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm** 1 appliance door for freezer compartment, 1 appliance door for fridge section, 1 pull-out

XL Appliance housings with aperture height between 1580 - 1940 mm

1293 789 **GD194-1X**	**XL Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm** 2 appliance doors

XL Fillers / Cladding

2088 **HPK20-1X** 20 cm	**XL Filler** Carcase material, 2088 mm high, U-shaped seal for connection to wall, width: 230 mm
1293 789 2085 **HPD20-1X** 20 cm	**XL Front filler** Continuous front material, width: 200 mm

Tall units, height 2 – 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm
Carcase height: 2088 mm
Plinth height: 70, 100, 150 oder 200 mm

Tall units	Appliance housing for ovens, microwaves, steam cookers, compact appliances	Appliance housings with aperture height up to 880 mm

Tall units

573
933
573

Pantry unit
3 doors,
2 fixed shelves,
4 shelves

H*-2 30/40/50/60 cm

1365
717

Pantry unit
2 doors,
1 fixed shelf,
4 shelves

HDV*-2 30/40/50/60 cm

573
933
573

Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
6 hanging baskets with wooden bottoms and metal railing, adjustable

HA*-2 30/40 cm

1365
717

Larder unit
1 pull-out with cushioned opening and closing SoftStoppPro,
6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-2 30/40 cm

573
933
573

Broom cupboard
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
1 system grid,
2 baskets for cleaning materials,
1 system shelf,
1 hose rack for vacuum cleaner,
2 pegboards

HB*-2 40/50/60 cm

573
933
573

Tall unit
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
5 internal pull-outs

**HI*-2** 40/50/60 cm

---

Appliance housing for ovens, microwaves, steam cookers, compact appliances

717 VAR
717

Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
2 shelves

GO-2

---

717 VAR
141
573

Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 drawer,
2 shelves

GOS-2

---

717 VAR
141
285
285

Oven housing
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 drawer,
2 pull-outs

GOS2A-2

---

429 VAR
573

Appliance housing for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 shelf

GMO-2

---

645 VAR
357

**Appliance housing for oven and microwave**
aperture height: 380 mm
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 pull-out

GMOA-2

429
429 VAR
573

Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
2 doors,
1 lifting door,
1 fixed compensation panel,
1 shelf

GLO-2

429
429 VAR
285
285

Appliance housing for oven and microwave with lifting door
aperture height: 370 mm
aperture height: 590 mm
1 door,
1 lifting door,
1 fixed compensation panel,
2 pull-outs

GLO2A-2

Appliance housings with aperture height up to 880 mm

573
933
573

Appliance housing for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves

G88-2

429
933
717

Appliance housing for integrated fridge
aperture height: 880 mm
2 doors,
1 appliance door,
1 shelf

GD88-2


573
933
285
285

Appliance housing for integrated fridge
aperture height: 880 mm
1 door,
1 shelf,
1 appliance door,
2 pull-outs

G88A-2

Appliance housings with aperture height up to 1230 mm

213
1293
573

Appliance housing for integrated fridge
aperture height: 1230 mm
1 flap,
1 internal panel,
1 appliance door,
1 door,
1 shelf

G123-2

501
1293
285

Appliance housing for integrated fridge
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel
1 appliance door,
1 pull-out

G123A-2

717
429
933

Appliance housing for integrated fridge / freezer
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel,
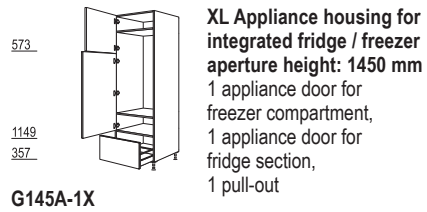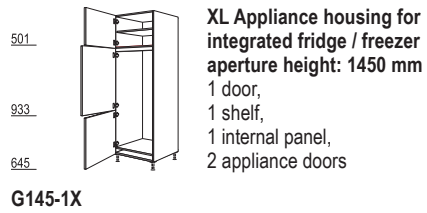1 appliance door for freezer compartment,
1 appliance door for fridge section

G123G-2
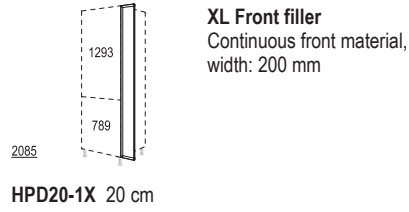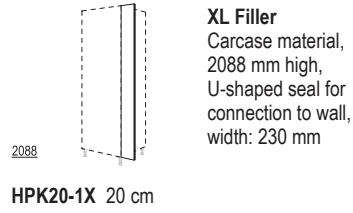
Tall units, height 2 – 2158 / 2188 / 2238 / 2288 mm high

Carcase depth: 561 mm
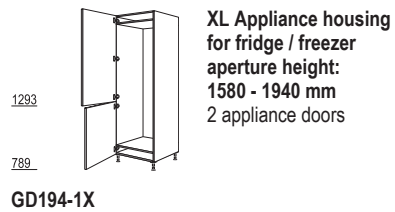Carcase height: 2088 mm
Plinth height: 70, 100, 150 oder 200 mm

Appliance housings with aperture height up to 1450 mm

|	
429 933 717	**Appliance housing for fridge / freezer aperture height: 1450 mm** 1 door, 1 internal panel, 2 appliance doors
GD145-2	
573 933 573	**Appliance housing for integrated fridge / freezer aperture height: 1450 mm** 1 door, 1 shelf, 1 internal panel, 2 appliance doors,
G145-2	

Fillers / Cladding

2088	**Filler** Carcase material, 2088 mm high, U-shaped seal for connection to wall, width: 230 mm
HPK20-2 20 cm	
1365 2085 717	**Front filler** Continuous front material, width: 200 mm
HPD20-2 20 cm	

Appliance housings with aperture height between 1580 - 1940 mm

213 1149 717	**Appliance housing for fridge / freezer aperture height: 1780 mm** 1 flap, 2 appliance doors
GD178-2	

Tall units in XL height, height 2 XL – 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm
Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm

XL

XL Tall units

573 933 645	**XL Pantry unit** 3 doors, 2 fixed shelves, 4 shelves

H*-2X 30/40/50/60 cm

1365 789	**XL Pantry unit** 2 doors, 1 fixed shelf, 5 shelves

HDV*-2X 30/40/50/60 cm

573 933 645	**XL Larder unit** 1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HA*-2X 30/40 cm

1365 789	**XL Larder unit** 1 pull-out with cushioned opening and closing SoftStoppPro, 6 hanging baskets with wooden bottoms and metal railing, adjustable

HDA*-2X 30/40 cm

|	
573 933 645	**XL Broom cupboard** 1 door, 1 fixed shelf, 1 shelf, 1 lug connected door, 1 system grid, 2 baskets for cleaning materials, 1 system shelf, 1 hose rack for vacuum cleaner, 2 pegboards

HB*-2X 40/50/60 cm

573 933 645	**XL Tall unit** 1 door, 1 fixed shelf, 1 shelf, 1 lug connected door, 5 internal pull-outs

HI*-2X 40/50/60 cm

## XL Appliance housing for ovens, micro-waves, steam cookers, compact appliances

717 VAR 789	**XL Oven housing** **aperture height: 590 mm** 2 doors, 1 fixed compensation panel, 3 shelves

GO-2X

717 VAR 141 645	**XL Oven housing** **aperture height: 590 mm** 2 doors, 1 fixed compensation panel, 1 drawer, 2 shelves

GOS-2X

|	
717 VAR 141 285 357	**XL Oven housing** **aperture height: 590 mm** 1 door, 1 shelf, 1 fixed compensation panel, 1 drawer, 2 pull-outs

GOS2A-2X

|	
429 VAR 645	**XL Appliance housing for oven and microwave** **aperture height: 380 mm** **aperture height: 590 mm** 2 doors, 1 fixed compensation panel, 1 shelf

GMO-2X

429 VAR 285 357	**XL Appliance housing for oven and microwave** **aperture height: 380 mm** **aperture height: 590 mm** 1 door, 1 fixed compensation panel, 2 pull-outs

GMO2A-2X

|	
429 429 VAR 645	**XL Appliance housing for oven and microwave with lifting door** **aperture height: 370 mm** **aperture height: 590 mm** 2 doors, 1 lifting door, 1 fixed compensation panel, 1 shelf

GLO-2X

429 429 VAR 285 357	**XL Appliance housing for oven and microwave with lifting door** **aperture height: 370 mm** **aperture height: 590 mm** 1 door, 1 lifting door, 1 fixed compensation panel, 2 pull-outs

**GLO2A-2X**

XL Appliance housings with aperture height up to 880 mm

573 933 645	**XL Appliance housing for integrated fridge** **aperture height: 880 mm** 2 doors, 1 appliance door, 2 shelves

G88-2X

429 933 789	**XL Appliance housing for integrated fridge** **aperture height: 880 mm** 2 doors, 1 appliance door, 2 shelves

GD88-2X

573 933 285 357	**XL Appliance housing for integrated fridge** **aperture height: 880 mm** 1 door, 1 shelf, 1 appliance door, 2 pull-outs

G88A-2X

## XL Appliance housings with aperture height up to 1230 mm

|	
213 1293 645	**XL Appliance housing for integrated fridge** **aperture height: 1230 mm** 1 flap, 1 internal panel, 1 appliance door, 1 door, 1 shelf

G123-2X

501 1293 357	**XL Appliance housing for integrated fridge** **aperture height: 1230 mm** 1 door, 1 shelf, 1 internal panel 1 appliance door, 1 pull-out

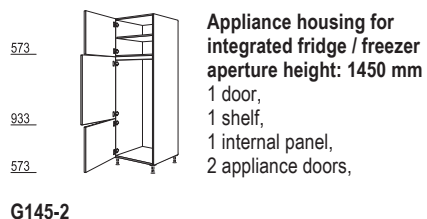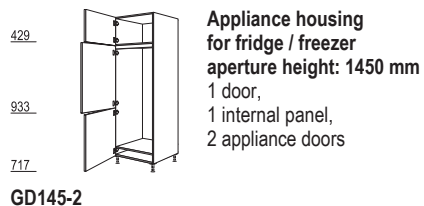**G123A-2X**

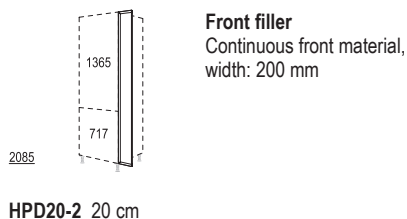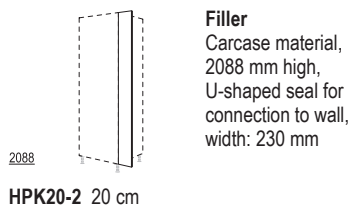|	
717 429 1005	**XL Appliance housing for integrated fridge / freezer** **aperture height: 1230 mm** 1 door, 1 shelf, 1 internal panel, 1 appliance door for freezer compartment, 1 appliance door for fridge section

G123G-2X

Tall units in XL height, height 2 XL – 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm
Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm

XL Appliance housings with aperture height up to 1450 mm

429 933 789 **GD145-2X**	**XL Appliance housing for fridge / freezer aperture height: 1450 mm** 1 door, 1 internal panel, 2 appliance doors
573 933 645 **G145-2X**	**XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm** 1 door, 1 shelf, 1 internal panel, 2 appliance doors

XL Appliance housings with aperture height between 1580 - 1940 mm

213 1149 789 **GD178-2X**	**XL Appliance housing for fridge / freezer aperture height: 1780 mm** 1 flap, 2 appliance doors

XL Fillers / Cladding

2160 **HPK20-2X** 20 cm	**XL Filler** Carcase material, 2160 mm high, U-shaped seal for connection to wall, width: 230 mm
1365 789 2157 **HPD20-2X** 20 cm	**XL Front filler** Continuous front material, width: 200 mm

Tall units, height 3 – 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm
Carcase height: 2160 mm
Plinth height: 70, 100, 150 oder 200 mm

Tall units

Pantry unit
3 doors,
2 fixed shelves,
4 shelves

645
933
573

H*-3 30/40/50/60 cm

Pantry unit
2 doors,
1 fixed shelf,
4 shelves

1437
717

HDV*-3 30/40/50/60 cm

Larder unit
1 pull-out with
cushioned opening and
closing SoftStoppPro,
6 hanging baskets with
wooden bottoms and
metal railing, adjustable

645
933
573

HA*-3 30/40 cm

Larder unit
1 pull-out with
cushioned opening and
closing SoftStoppPro,
6 hanging baskets with
wooden bottoms and
metal railing, adjustable

1437
717

HDA*-3 30/40 cm

Broom cupboard
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
1 system grid,
2 baskets for cleaning
materials,
1 system shelf,
1 hose rack for vacuum
cleaner,
2 pegboards

645
933
573

HB*-3 40/50/60 cm

Tall unit
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
5 internal pull-outs

645
933
573

HI*-3 40/50/60 cm

## Appliance housing for ovens, micro-waves, steam cookers, compact appliances

Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
3 shelves

789 VAR
717

GO-3

Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 drawer,
3 shelves

789 VAR
141
573

GOS-3

Oven housing
aperture height: 590 mm
1 door,
2 shelves,
1 fixed compensation panel,
1 drawer,
2 pull-outs

789 VAR
141
285
285

GOS2A-3

**Appliance housing**
for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
2 shelves

501 VAR
573

GMO-3

Appliance housing
for oven and microwave
aperture height: 380 mm
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 pull-out

717 VAR
357

GMOA-3

Appliance housing for
oven and microwave with
lifting door
aperture height: 370 mm
aperture height: 590 mm
2 doors,
1 lifting door,
1 fixed compensation panel,
2 shelves

501
429 VAR
573

GLO-3

Appliance housing for
oven and microwave with
lifting door
aperture height: 370 mm
aperture height: 590 mm
1 door,
1 shelf,
1 lifting door,
1 fixed compensation panel,
2 pull-outs

501
429 VAR
285
285

GLO2A-3

Appliance housings with aperture height up to 880 mm

**Appliance housing
for integrated fridge**
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves

645
933
573

G88-3

**Appliance housing
for integrated fridge**
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves

501
933
717

GD88-3

**Appliance housing
for integrated fridge**
aperture height: 880 mm
1 door,
1 shelf,
1 appliance door,
2 pull-outs

645
933
285
285

G88A-3

Appliance housings with aperture height up to 1230 mm

**Appliance housing
for integrated fridge**
aperture height: 1230 mm
1 flap,
1 internal panel,
1 appliance door,
1 door,
1 shelf

285
1293
573

G123-3

**Appliance housing
for integrated fridge**
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel
1 appliance door,
1 pull-out

573
1293
285

G123A-3

**Appliance housing for
integrated fridge / freezer**
aperture height: 1230 mm
1 door,
2 shelves,
1 internal panel,
1 appliance door for
freezer compartment,
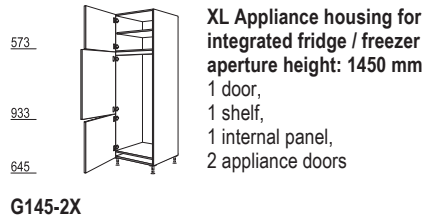1 appliance door for
fridge section

789
429
933

G123G-3

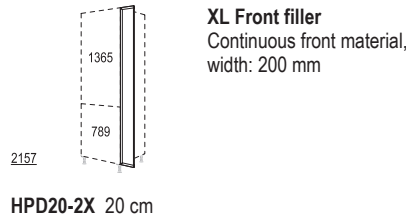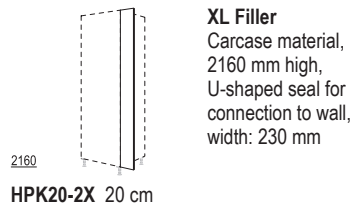# Tall units, height 3 – 2230 / 2260 / 2310 / 2360 mm high

Carcase depth: 561 mm
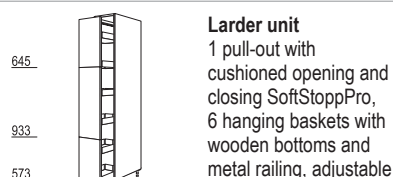Carcase height: 2160 mm
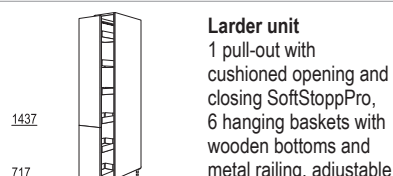Plinth height: 70, 100, 150 oder 200 mm
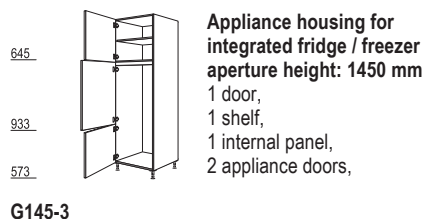
Appliance housings with aperture height up to 1450 mm	Fillers / Cladding

Appliance housings with aperture height up to 1450 mm

501
933
717
GD145-3

Appliance housing for fridge / freezer aperture height: 1450 mm
1 door,
1 shelf,
1 internal panel,
2 appliance doors

645
933
573
G145-3

Appliance housing for integrated fridge / freezer aperture height: 1450 mm
1 door,
1 shelf,
1 internal panel,
2 appliance doors,

Fillers / Cladding

2160
HPK20-3 20 cm

Filler
Carcase material,
2160 mm high,
U-shaped seal for connection to wall,
width: 230 mm

1437
717
2157
HPD20-3 20 cm

Front filler
Continuous front material,
width: 200 mm

Appliance housings with aperture height between 1580 - 1940 mm

285
1149
717
GD178-3

Appliance housing for fridge / freezer aperture height: 1780 mm
1 flap,
2 appliance doors

Tall units in XL height, height 3 XL – 2302 / 2332 / 2382 / 2432 mm high

Carcase depth: 561 mm
Carcase height: 2232 mm
Plinth height: 70, 100, 150 oder 200 mm

XL

XL Tall units

XL Pantry unit
3 doors,
2 fixed shelves,
4 shelves

645
933
645

H*-3X 30/40/50/60 cm

XL Pantry unit
2 doors,
1 fixed shelf,
5 shelves

1437
789

HDV*-3X 30/40/50/60 cm

XL Larder unit
1 pull-out with
cushioned opening and
closing SoftStoppPro,
5 hanging baskets with
wooden bottoms and
metal railing, adjustable,
1 fixed shelf

645
933
645

HA*-3X 30/40 cm

XL Larder unit
1 pull-out with
cushioned opening and
closing SoftStoppPro,
5 hanging baskets with
wooden bottoms and
metal railing, adjustable,
1 fixed shelf

1437
789

HDA*-3X 30/40 cm

XL Broom cupboard
1 door,
1 fixed shelf,
1 shelf,
1 lug connected door,
1 system grid,
2 baskets for cleaning
materials,
1 system shelf,
1 hose rack for vacuum
cleaner,
2 pegboards

645
933
645

HB*-3X 40/50/60 cm

XL Tall unit
1 door,
1 fixed shelf,
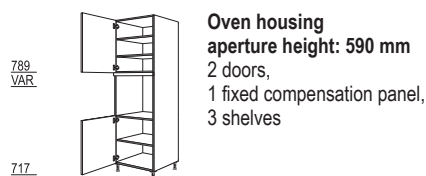1 shelf,
1 lug connected door,
5 internal pull-outs

645
933
645

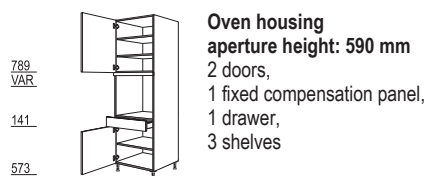**HI*-3X** 40/50/60 cm

XL Appliance housing for ovens, micro-waves, steam cookers, compact appliances

XL Oven housing
aperture height: 590 mm
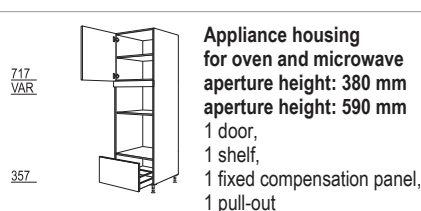2 doors,
1 fixed compensation panel,
4 shelves

789 VAR
789

GO-3X

XL Oven housing
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
1 drawer,
3 shelves

789 VAR
141
645

GOS-3X

XL Oven housing
aperture height: 590 mm
1 door,
2 shelves,
1 fixed compensation panel,
1 drawer,
2 pull-outs

789 VAR
141
285
357

GOS2A-3X

**XL Appliance housing
for oven and microwave**
aperture height: 380 mm
aperture height: 590 mm
2 doors,
1 fixed compensation panel,
2 shelves

501 VAR
645

GMO-3X

**XL Appliance housing
for oven and microwave**
aperture height: 380 mm
aperture height: 590 mm
1 door,
1 shelf,
1 fixed compensation panel,
1 pull-out

717 VAR
429

GMOA-3X

**XL Appliance housing for
oven and microwave with
lifting door**
aperture height: 370 mm
aperture height: 590 mm
2 doors,
1 lifting door,
1 fixed compensation panel,
2 shelves

501
429 VAR
645

GLO-3X

**XL Appliance housing for
oven and microwave with
lifting door**
aperture height: 370 mm
aperture height: 590 mm
1 door,
1 shelf,
1 lifting door,
1 fixed compensation panel,
2 pull-outs

501
429 VAR
285
357

GLO2A-3X

XL Appliance housings with aperture height up to 880 mm

**XL Appliance housing
for integrated fridge**
aperture height: 880 mm
2 doors,
1 appliance door,
2 shelves

645
933
645

G88-3X

**XL Appliance housing
for integrated fridge**
aperture height: 880 mm
2 doors,
1 appliance door,
3 shelves

501
933
789

GD88-3X

**XL Appliance housing
for integrated fridge**
aperture height: 880 mm
1 door,
1 shelf,
1 appliance door,
2 pull-outs

645
933
285
357

G88A-3X

XL Appliance housings with aperture height up to 1230 mm

**XL Appliance housing
for integrated fridge**
aperture height: 1230 mm
1 flap,
1 internal panel,
1 appliance door,
1 door,
1 shelf

285
1293
645

G123-3X

**XL Appliance housing
for integrated fridge**
aperture height: 1230 mm
1 door,
1 shelf,
1 internal panel,
1 appliance door,
1 pull-out

573
1293
357

G123A-3X

**XL Appliance housing for
integrated fridge / freezer**
aperture height: 1230 mm
1 door,
2 shelves,
1 internal panel,
1 appliance door for
freezer compartment,
1 appliance door for
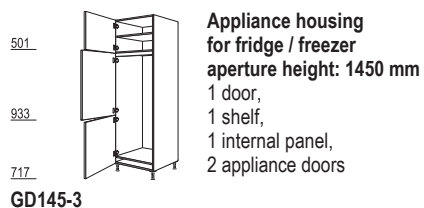fridge section

789
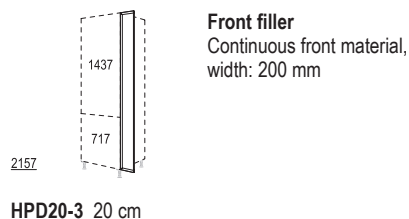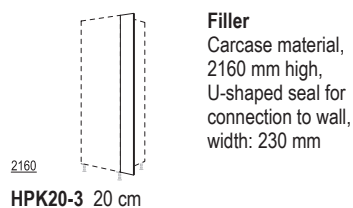429
1005

G123G-3X

Tall units in XL height, height 3 XL – 2302 / 2332 / 2382 / 2432 mm high

Carcase depth: 561 mm
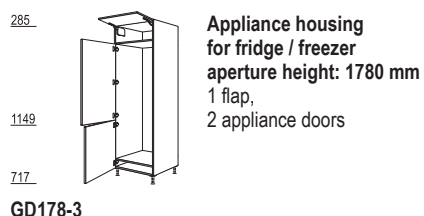Carcase height: 2232 mm
Plinth height: 70, 100, 150 oder 200 mm

XL Appliance housings with aperture height up to 1450 mm

501 933 789 **GD145-3X**	**XL Appliance housing for fridge / freezer aperture height: 1450 mm** 1 door, 1 shelf, 1 internal panel, 2 appliance doors
645 933 645 **G145-3X**	**XL Appliance housing for integrated fridge / freezer aperture height: 1450 mm** 1 door, 1 shelf, 1 internal panel, 2 appliance doors,

XL Appliance housings with aperture height between 1580 - 1940 mm

1437 789 **GD194-3X**	**XL Appliance housing for fridge / freezer aperture height: 1580 - 1940 mm** 2 appliance doors

XL Fillers / Cladding

2232 **HPK20-3X** 20 cm	**XL Filler** Carcase material, 2232 mm high, U-shaped seal for connection to wall, width: 230 mm
1437 789 2229 **HPD20-3X** 20 cm	**XL Front filler** Continuous front material, width: 200 mm

Wall units 360 mm high

Carcase depth: 350 mm
Carcase height: 360 mm

Wall units 360 mm high	Wall units 360 mm high	Fillers

Wall units 360 mm high

357

Wall unit
1 door

W*-36
45/50/60 cm

357

Wall unit with flap door
1 flap,
opening angle 107°

WK*-36
45/50/60/80/90/100/
120 cm

357

Wall unit with framed glass flap door
1 framed glass flap door,
clear glass No. 01,
opening angle 107°,
glass variants against
surcharge: no. 02 / 39

WKG*-36
50/60/80/90/100/
120 cm

No image

MP-GW

Surcharge for different glass choice
for glass variants:
No. 02 Matt glass
No. 39 Black glass

Wall units 360 mm high

357

WKSQ*-36
50/60/80/90/100/
120 cm

Wall unit with glass doors Square
1 aluminium framed flap,
opening angle 107°,
handleless version with wall
unit bottom shelf with
attached profile strip in
stainless steel appearance

Available in:
No. 321 Aluminium framed
front in stainless steel
appearance with
02 Matt glass
No. 308 Aluminium framed
front in stainless steel
appearance with
035 Grey glass
No. 329 Aluminium framed
front in Black with
39 Black glass

Open shelf wall unit
side depth: 371 mm

WR*-36
30/40/45/50/60/80/90/
100/120 cm

Fillers

Filler
Carcase material,
360 mm high,
U-shaped seal for
connection to wall,
width: 100 mm / 200 mm

WPK*-36
10/20 cm

357

Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm

WPD20-36
20 cm

Wall units 576 mm high

Carcase depth: 350 mm
Carcase height: 576 mm

		Wall units 576 mm high

Wall unit
1 door,
1 shelf

W*-58
20/30/35/40/45/50/60 cm

Wall unit
2 doors,
1 shelf

W2T-58   60 cm
W*-58   80/90/100/120 cm

Wall unit
2 doors hinged
parallel,
1 shelf

W2TP*-58
80/90/100 cm

Wall unit
1 folding door with slide
mechanism,
1 shelf

WFT60-58
60 cm

Wall unit, folding/lifting door
1 folding/lifting door,
2 original fronts,
1 shelf

WFL*-58
50/60/80/90/100/120 cm

Wall unit for microwave
1 aperture depending
on appliance height,
1 flap as niche
compensation

WM*-58
50/60 cm

Corner wall unit, diagonal
1 door: 394 mm wide,
opening angle 90°,
1 shelf,
Planning dimensions:
650 x 650 mm

WED65-58

Corner wall unit
1 door,
1 angle filler,
1 shelf
Carcase widths:
600, 782, 882 mm

Planning dimensions
(variable):
450 (390 - 500) x ...
WE60-20: ...650 (630 - 700) mm
WE80-35: ...800 (790 - 850) mm
WE90-45: ...900 (890 - 950) mm

WE60-20-58
WE80-35-58
WE90-45-58

Open shelf wall unit
1 fixed shelf,
side depth: 371 mm

WR*-58
15/20/30/40/45/50/60 cm

Wall unit as bottle rack
3 fixed shelves,
side depth: 371 mm

WRF15-58
15 cm

Fillers

Filler
Carcase material,
576 mm high,
U-shaped seal for
connection to wall,
width: 100 mm / 200 mm

WPK*-58
10/20 cm

Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm

WPD20-58
20 cm

Wall units, height 1 – 720 mm high

Carcase depth: 350 mm
Carcase height: 720 mm

Wall units 720 mm high	Wall units 720 mm high	Wall units 720 mm high

Wall unit
1 door,
2 shelves

W*-1
20/25/30/35/40/45/50/55/60 cm

Wall unit
2 doors,
2 shelves

W2T-1 60 cm
W*-1 80/90/100 cm

Wall unit
2 doors hinged parallel,
2 shelves

W2TP*-1
80/90/100 cm

Wall unit
1 folding door with slide mechanism,
2 shelves

WFT60-1
60 cm

Wall unit, framed glass door
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: no. 02 / 39

WG*-1
45/50/60 cm

Wall unit, framed glass door
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: no. 02 / 39

WG*-1
90/100 cm

Wall unit, segmented glass door
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: no. 02 / 39

WGLS*-1
45/50/60 cm

Wall unit, segmented glass door
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: no. 02 / 39

WGLS*-1
90/100 cm

No image

MP-GW

Surcharge for different glass choice
for glass variants:
No. 02 Matt glass
No. 39 Black glass

Wall unit, folding/lifting door
1 folding/lifting door,
2 original fronts,
2 shelves

WFL*-1
50/60/80/90/100/120 cm

Wall unit, folding/lifting door
1 folding/lifting door,
1 top original front,
1 bottom framed glass front,
clear glass No. 01,
2 glass shelves,
glass variants against surcharge: no. 02 / 39

WFLG*-1
50/60/80/90/100/120 cm

Wall unit for microwave
1 aperture depending on appliance height,
1 flap as niche compensation

WM*-1
50/60 cm

Corner wall unit, diagonal
1 door: 394 mm wide,
opening angle 90°,
2 shelves,
Planning dimensions:
650 x 650 mm

WED65-1

Corner wall unit
2 doors
with 165° hinges,
2 shelves,
hinged side = first door to be opened

WE*-1
60/65/80/90 cm

Corner wall unit
1 door,
1 angle filler,
2 shelves
Carcase widths:
600, 782, 882 mm

Planning dimensions (variable):
450 (390 - 500) x ...
WE60-20: ...650 (630 - 700) mm
WE80-35: ...800 (790 - 850) mm
WE90-45: ...900 (890 - 950) mm

WE60-20-1
WE80-35-1
WE90-45-1

Open shelf wall unit
2 fixed shelves,
side depth: 371 mm

WR*-1
15/20/30/40/45/50/60 cm

Wall unit as bottle rack
4 fixed shelves,
side depth: 371 mm

WRF15-1
15 cm

Fillers

Filler
Carcase material,
720 mm high,
U-shaped seal for connection to wall ,
width: 100 mm / 200 mm

WPK*-1
10/20 cm

Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm

WPD20-1
20 cm

Wall units, height 2 – 792 mm high

Carcase depth: 350 mm
Carcase height: 792 mm

Wall units 792 mm high	Wall units 792 mm high	Wall units 792 mm high

Wall units 792 mm high (column 1)

Wall unit
1 door,
2 shelves

789

W*-2 20/25/30/35/40/45/50/55/60 cm

Wall unit
2 doors,
2 shelves

789

W2T*-2 60 cm
W*-2 80/90/100 cm


Wall unit
2 doors hinged
parallel,
2 shelves

789

W2TP*-2
80/90/100 cm

Wall unit
1 folding door with slide
mechanism,
2 shelves

789

WFT60-2
60 cm

**Wall unit,
framed glass door**
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

789

WG*-2
45/50/60 cm

**Wall unit,
framed glass door**
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

789

WG*-2
90/100 cm

**Wall unit,
segmented glass door**
1 door,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

429
141

WGLS*-2
45/50/60 cm

Wall units 792 mm high (column 2)

**Wall unit,
segmented glass door**
2 doors,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

429
141

WGLS*-2
90/100 cm

No image

MP-GW

**Surcharge for different
glass choice**
for glass variants:
No. 02 Matt glass
No. 39 Black glass

**Wall unit,
folding/lifting door**
1 folding/lifting door,
2 original fronts,
2 shelves

429
357

492 250*

WFL*-2
50/60/80/90/100/120 cm

**Wall unit,
folding/lifting door**
1 folding/lifting door,
1 top original front,
1 bottom framed glass front,
clear glass No. 01,
2 glass shelves,
glass variants against
surcharge: no. 02 / 39

429
357

492 250*

WFLG*-2
50/60/80/90/100/120 cm

Wall unit for microwave
1 aperture depending
on appliance height,
1 flap as niche
compensation

VAR

WM*-2
50/60 cm

**Corner wall unit,
diagonal**
1 door: 394 mm wide,
opening angle 90°,
2 shelves,
Planning dimensions:
650 x 650 mm

789

WED65-2

Corner wall unit
2 doors
with 165° hinges,
2 shelves,
hinged side = first
door to be opened

789

WE*-2
60/65/80/90 cm

Wall units 792 mm high (column 3)

Corner wall unit
1 door,
1 angle filler,
2 shelves
Carcase widths:
600, 782, 882 mm

Planning dimensions
(variable):
450 (390 - 500) x ...
WE60-20: ...650 (630 - 700) mm
WE80-35: ...800 (790 - 850) mm
WE90-45: ...900 (890 - 950) mm

789

WE60-20-2
WE80-35-2
WE90-45-2

Open shelf wall unit
2 fixed shelves,
side depth: 371 mm

WR*-2
15/20/30/40/45/50/60 cm

**Wall unit as bottle rack**
4 fixed shelves,
side depth: 371 mm

WRF15-2
15 cm

Fillers

Filler
Carcase material,
792 mm high,
U-shaped seal for
connection to wall,
width: 100 mm / 200 mm

WPK*-2
10/20 cm

Front filler
Continuous front material,
2 shelves top and bottom,
1 wall unit side panel:
350 mm deep,
width: 200 mm

789

WPD20-2
20 cm

Wall units, height 3 – 864 mm high

Carcase depth: 350 mm
Carcase height: 864 mm

Wall units for cooker hoods
Bridging shelf

Wall units 864 mm high

|	
	Wall unit 1 door, 2 shelves **W*-3** 20/25/30/35/40/45/50/55/60 cm
	Wall unit 2 doors, 2 shelves **W2T*-3** 60 cm **W*-3** 80/90/100 cm
	Wall unit 2 doors hinged parallel, 2 shelves **W2TP*-3** 80/90/100 cm
	Wall unit 1 folding door with slide mechanism, 2 shelves **WFT60-3** 60 cm
	Wall unit, **framed glass door** 1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39 **WG*-3** 45/50/60 cm
	Wall unit, **framed glass door** 2 doors, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39 **WG*-3** 90/100 cm
	Wall unit, **segmented glass door** 1 door, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39 **WGLS*-3** 45/50/60 cm
	Wall unit, **segmented glass door** 2 doors, clear glass No. 01, 2 glass shelves, glass variants against surcharge: no. 02 / 39 **WGLS*-3** 90/100 cm
No image **MP-GW**	**Surcharge for different** **glass choice** for glass variants: No. 02 Matt glass No. 39 Black glass

Wall units 864 mm high

|	
VAR	**Wall unit for microwave** 1 aperture depending on appliance height, 1 door as niche compensation, 1 shelf **WM*-3** 50/60 cm
	Corner wall unit, **diagonal** 1 door: 394 mm wide, opening angle 90°, 2 shelves, Planning dimensions: 650 x 650 mm **WED65-3**
	Corner wall unit 2 doors with 165° hinges, 2 shelves, hinged side = first door to be opened **WE*-3** 60/65/80/90 cm
	Corner wall unit 1 door, 1 angle filler, 2 shelves Carcase widths: 600, 782, 882 mm Planning dimensions (variable): 450 (390 - 500) x ... WE60-20: ...650 (630 - 700) mm WE80-35: ...800 (790 - 850) mm WE90-45: ...900 (890 - 950) mm **WE60-20-3** **WE80-35-3** **WE90-45-3**
	Open shelf wall unit 2 fixed shelves, side depth: 371 mm **WR*-3** 15/20/30/40/45/50/60 cm
	Wall unit as bottle rack 5 fixed shelves, side depth: 371 mm, width: 150 mm **WRF15-3** 15 cm

Fillers

	Filler Carcase material, 864 mm high, U-shaped seal for connection to wall, width: 100 mm / 200 mm **WPK*-3** 10/20 cm
	Front filler Continuous front material, 2 shelves top and bottom, 1 wall unit side panel: 350 mm deep, width: 200 mm **WPD20-3** 20 cm

Wall units for cooker hoods

		Wall unit for **slimline cooker hoods** internal panel, metal grids, 80 mm deep, the number of metal grids depends on the built-in dimensions of the cooker hood
WDAF60-58	60 cm	height: 576 mm
WDAF60-1	60 cm	height: 720 mm
WDAF60-2	60 cm	height: 792 mm
WDAF60-3	60 cm	height: 864 mm

Bridging shelf

WZB260	**Bridging shelf in** **carcase material** laminated on both faces in the same colour, 16 mm thick, 350 mm deep, with edging material on 3 sides, for fitting between wall units or as a window bridging. **Price per running 100 mm**, invoiced per started 100 mm. Width: 250 - 2580 mm
WZB60	Bridging shelf in carcase material as above, **however 600 mm wide**

Accessories

Plastic cutlery trays and pull-out organisers

BE* Y
30/40/45/50/60/80/
90/100/120 cm

Cutlery tray Youno
Slate grey, height: 49 mm,
fits drawer depth of 500 mm,
side depth: 561 mm

300 400 450 500 600

800 900 1000 1200

BE* -46 Y
45/50/60/80/90/
100/120 cm

as above, however for drawer depth 400 mm,
side depth: 461 mm

450 500 600 800

900 1000 1200
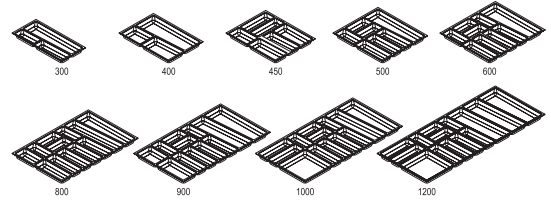
BE* D
30/40/45/50/60/80/
90/100/120 cm
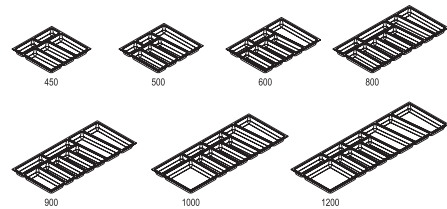
Cutlery tray Depot
Non-slip soft touch surface,
slate grey, height: 49 mm,
fits drawer depth 500 mm,
side depth: 561 mm

300 400 450 500 600

800 900 1000 1200
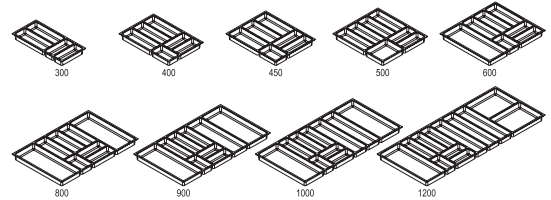
BE* -46 D
45/50/60/80/90/
100/120 cm

as above, however for drawer depth 400 mm,
side depth: 461 mm

450 500 600 800

900 1000 1200

Accessories
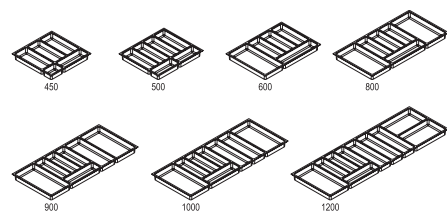
Cutlery trays and pull-out organisers **in slate grey ash wood**	

Slate grey ash wood cutlery tray
Solid ash wood, coated slate grey,
height: 49 mm, fits drawer depth 500 mm,
side depth: 561 mm

BE* ES
30/40/45/50/60/80/
90/100/120 cm

300 400 450 500 600
800 900 1000 1200
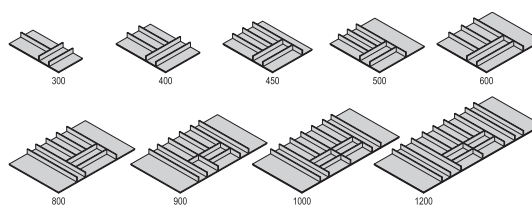
BE* -46 ES
45/50/60/80/90/
100/120 cm

as above, however for drawer depth 400 mm,
side depth: 461 mm

450 500 600 800
900 1000 1200
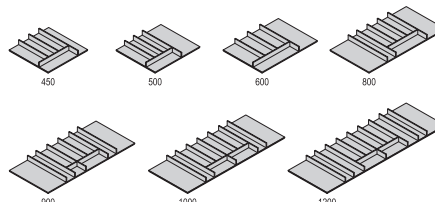
Slate grey ash wood cutlery tray with knife block
Solid ash wood, coated slate grey,
incl. 5 knives,
height: 49 mm, fits drawer depth 500 mm,
side depth: 561 mm

BE-M 60 ES
60 cm

*For drawers with height of 141 mm, not possible in
conjunction with construction or spacer shelves KKB* / DBKI*.*

Not for use in conjunction with LED interior unit light LSID.

Not possible for drawers SKU and SKA*.*

Pull-out organiser, slate grey ash
with solid wood partitions for individualised divisions,
fits pull-out depth 500 mm, side depth: 561 mm,
incl. 8 solid wood partitions in ash for 600 mm width,
incl. 16 solid wood partitions in ash for 800/900/1000 mm width,
incl. 24 solid wood partitions in ash for 1200 mm width

AO* ES
60/80/90/100/120 cm

Pull-out organiser, slate grey ash
with solid wood partitions for individualised divisions,
fits pull-out depth 500 mm, side depth: 561 mm,
incl. 7 solid wood partitions in ash for 600 mm width,
incl. 10 solid wood partitions in ash for 800/900/1000 mm width,
incl. 13 solid wood partitions in ash for 1200 mm width

AOS* ES
60/80/90/100/120 cm

Accessories

Oak cutlery trays and pull-out organisers

BE* E
30/40/45/50/60/80/90/
100/120 cm

Oak wooden cutlery tray
Solid wood design in oak,
height: 49 mm, fits drawer depth of 500 mm,
side depth: 561 mm
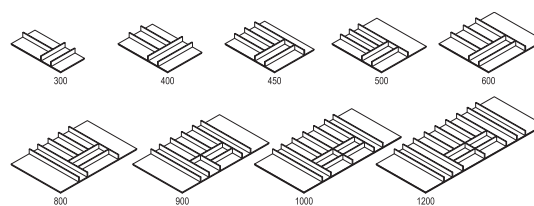
BE* -46 E
45/50/60/80/90/
100/120 cm

as above, however for drawer depth 400 mm,
side depth: 461 mm
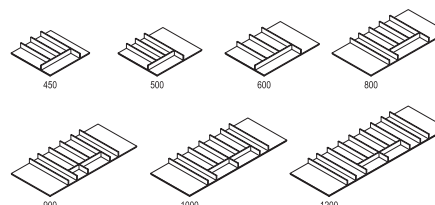
BE-M 60 E
60 cm

Oak wooden cutlery tray with knife block
Solid oak wood design,
incl. 5 knives,
height: 49 mm, fits drawer depth 500 mm,
side depth: 561 mm

*For drawers with height of 141 mm, not possible in
conjunction with construction or spacer shelves KKB* / DBKI*.*

Not for use in conjunction with LED interior unit light LSID.

AO* E
60/80/90/100/120 cm

Pull-out organiser, oak
with solid wood partitions for individualised divisions,
fits pull-out depth 500 mm, side depth: 561 mm,
incl. 8 solid wood partitions in oak for 600 mm width,
incl. 16 solid wood partitions in oak for 800/900/1000 mm width,
incl. 24 solid wood partitions in oak for 1200 mm width

AOS* E
60/80/90/100/120 cm

Pull-out organiser made of oak
with solid wood partitions for individualised divisions,
fits pull-out depth 500 mm, side depth: 561 mm,
incl. 7 solid wood partitions in oak for 600 mm width,
incl. 10 solid wood partitions in oak for 800/900/1000 mm width,
incl. 13 solid wood partitions in oak for 1200 mm width

Accessories

Mounting sets

Mounting set 1
consisting of:
- 1 ball siphon 1 ½" with 40 mm drain white
- 1 space-saving connector white
- 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
- 1 HT transition element DN 40 / 50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
- 2 flex hoses acc. to KTW-A, 300 mm long,
  3/8" x 10 mm with union nut

MONSET 1

Mounting set 2
consisting of:
- 1 ball siphon 1 ½" with 40 mm drain white
- 1 space-saving connector white
- 1 HT bend DN 40/87 grey
- 1 HT tube DN 40 x 250 mm grey
- 1 HT transition element DN 40 / 50 mm grey
- 1 cooker connection cable, 5 x 2.5 mm², 2000 mm long
- 2 flex hoses acc. to KTW-A, 300 mm long,
  3/8" x 10 mm with union nut
- 1 hose clip, 16 - 25 mm
- 1 table socket, triple, sockets - model F,
  with contact protection, white
  with 1500 mm supply line, 3 x 1.5 mm²

MONSET 2

Accessories for sink units

Moisture protection sheet
aluminium sheet, serrated, for sink base units,
cannot be used with front pull-outs,
fits only for a side depth of 561 mm

FB*
40/45/50/60/80/90/
100/120 cm

FB90: also fits corner sink units SPUE(D)90-45(-X)
and NSPUE90-45(-X)
FB100: also fits corner sink units SPUE(D)100-50(-X)
and NSPUE100-50(-X)

Waterproof mat
plastic, slate grey, for sink base units,
not for use with front pull-outs,
fits only side depth of 561 mm

WSMS*
40/45/50/60/80/90/
100/120 cm

*Not possible in conjunction with hose and cable
feed-through SKD or with opening support mechanism
Libero AOUL.*

Waterproof mat Pro for sink units
Slate grey plastic,
for preventing water damage in sink units
not suitable for front pull-outs,
only suitable for 561 mm side depth

WSMP*
60/80 cm

Upstands

Plastic upstand
Top section with sealing lips,
dimensions: 25 mm high, 25 mm deep,
delivered as strand material.

Available in all worktop décors,
also available in:
No. 014 Stainless steel appearance

WAP
200/400/500 cm

Length 2000 mm

Length 4000 mm

Special length 5000 mm

WAP accessory bag
matches the plastic upstands WAPN
underline{consisting of:}
4 x interior corner 90°
2 x interior corner 135°
2 x exterior corner 90°
2 x set of end caps

WAP-Z

Upstands for continuous planning with niche cladding
2-piece plastic profile with sealing lip,
incl. vertical sealing profile
dimensions: 25 mm high, 25 mm deep
delivered as strand material.

WAPN
200/400/500 cm

Available in:
014 Stainless steel appearance, 010 Black

Bottom profile adds 4 mm to the worktop.

Length 2000 mm

Length 4000 mm

Special length 5000 mm

WAP accessory bag
matches the plastic upstands WAPN
underline{consisting of:}
4 x interior corner 90° / 2 x interior corner 135°
2 x exterior corner 90°
2 x set of end caps for WAPN
2 x set of end caps for niche cladding

WAPN-Z

Available in:
014 Stainless steel appearance, 010 Black

Waste collecting systems

Built-in waste collector „Solo"
plastic, slate grey, with full pull-out, capacity: 20 litres,
Built-in dimensions: h x w x d = 396 x 245 x 427 mm
To be fitted on site onto the bottom shelf.

Can be built-in upwards of 300 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS9430

Built-in waste collector „Tandem 8/8/8"
sorting in 3 bins:
volume: 3 x 8 l,
h x w x d = 401 x 263 x 437 mm
To be fitted on site onto the bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10488

Built-in waste collector Tandem 13/13
sorting in 2 bins:
volume: 2 x 13 l,
h x w x d = 401 x 263 x 437 mm
To be fitted on site onto the bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10494

Built-in waste collector „space saving Tandem"
Sorting in 3 bins:
Capacity: 1 x 18 l, 2 x 8.5 l,
1 additional lid for organic waste,
H x W x D = 320 x 336 x 475 mm
To be fitted on site onto bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10484

Built-in waste collector „space saving Tandem S 12/8/8"
sorting in 3 bins:
volume: 1 x 12 l, 2 x 8 l,
1 additional bio lid,
h x w x d = 347 x 434 x 330 mm

Can be built-in upwards of 500 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10485

Built-in waste collector „space saving Tandem 18/18"
sorting in 2 bins:
volume: 2 x 18 l,
h x w x d = 336 x 346 x 475 mm
To be fitted on site onto the bottom shelf.

Can be built-in upwards of 400 mm door width.

Take sink syphon into account and plan space saving connector 021!

AS10487

Waste collecting systems

Waste collecting systems **(pull-outs, fitted to the front)**	

Built-in waste collector „Syncro"
Fully synchronised pull-out rails, with over extension runner, cushioned and covered, metal and plastic parts in slate grey.
h x d: 424 x 400 mm
Contents: 2 x 18 litres

Matching sink units: SPUA(D)45(-X) / SPUA45(-M) / NSPUAL45(-X)!

AS3550

AS3551

as above, however, with the following contents:
1 x 18 l, 2 x 13 l, 1 additional bio lid

Matching sink units: SPUA(D)50(-X) / SPUA50(-M) / NSPUAL50(-X)!

AS3552

as above, however, with the following contents:
2 x 28 l

Matching sink units: SPUA(D)60(-X) / SPUA60(-M) / NSPUAL60(-X)!

AS3553

as above, however, with the following contents:
1 x 28 l, 2 x 13 l, 1 additional bio lid

Matching sink units: SPUA(D)60(-X) / SPUA60(-M) / NSPUAL60(-X)!

Built-in waste collector „X-Line" X45 M35 Basic
35-litre large container with cover frame with flexible bin liner clamping system,
suitable for 35-litre waste bags,
Basic drawer as partial pull-out,
h x w x d: 393 x 418 x 368 mm

Matching sink units: SPUA(D)-BW45/SPUA(D)K-BW45(-X) and NSPUA(K)-BW45(-X)!

AS9426

AS9428

Built-in waste collector "X-Line" X50 M35 Basic
as above, but
h x w x d: 393 x 468 x 368 mm

Matching sink units: SPUA(D)-BW50/SPUA(D)K-BW50(-X) and NSPUA(K)-BW50(-X)!

Built-in waste collector "X-Line" X60 M7 Basic
as above, but with additional 15 litre container with lid,
h x w x d: 393 x 568 x 368 mm

Matching sink units: SPUA(D)-BW60/SPUA(D)K-BW60(-X) and NSPUA(K)-BW60(-X)!

AS9429

Built-in waste collector "X-Line" X60 M5 Basic
as above, but with additional base tray that can be placed on the left or right
8- and 5-litre container with lid,
h x w x d: 393 x 568 x 368 mm

Matching sink units: SPUA(D)-BW60/SPUA(D)K-BW60(-X) and NSPUA(K)-BW60(-X)!

AS9433

Waste collecting systems

Built-in waste collector „Mono"
*made of metal with removable plastic waste bins,
lid and rims are black plastic, right-hand side or left-hand side mounting,
no load on door hinges, 15 l capacity.
Lid automatically lifts upon opening door. Dimensions: h x w x d = 365 x 290 x 304 mm
Please note: Only mount waste collector on side wall with door hinge or on centre stile with
corner sink units.*

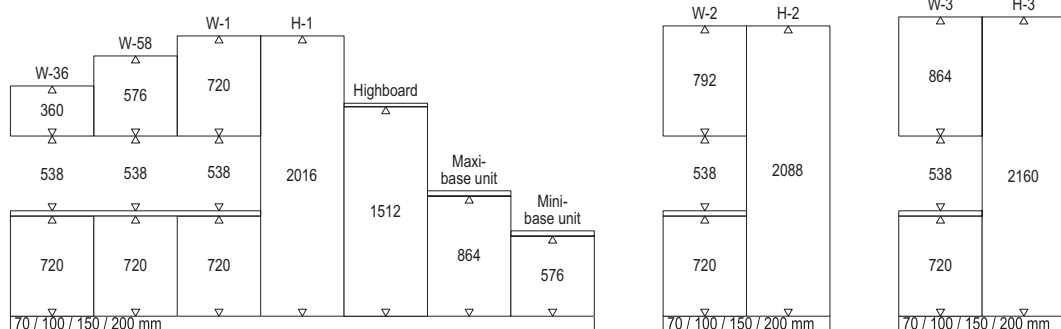*Can be built-in upwards of 400 mm door width.*
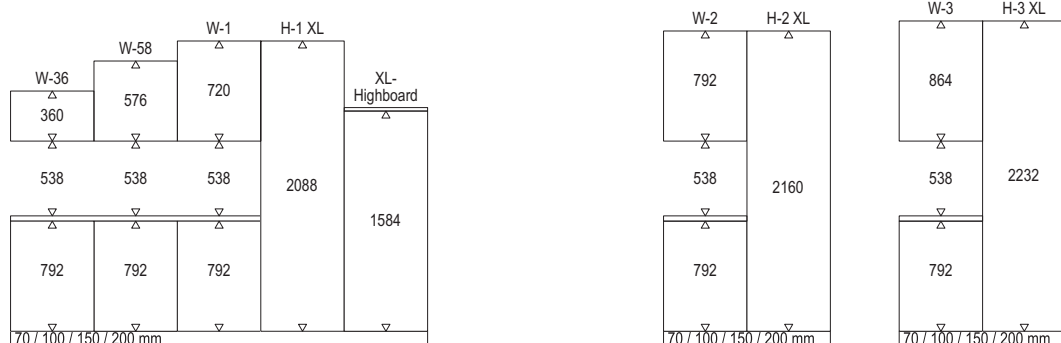
AS3476

Built-in waste collector „Euro Flexx"
35 l large container with cover frame and bin liner clamping system,
fits 1 x 35 l or 2 x 17 l,
lid with indentation
can be mounted on the right or left
h x w x d = 499 x 370 x 356 mm
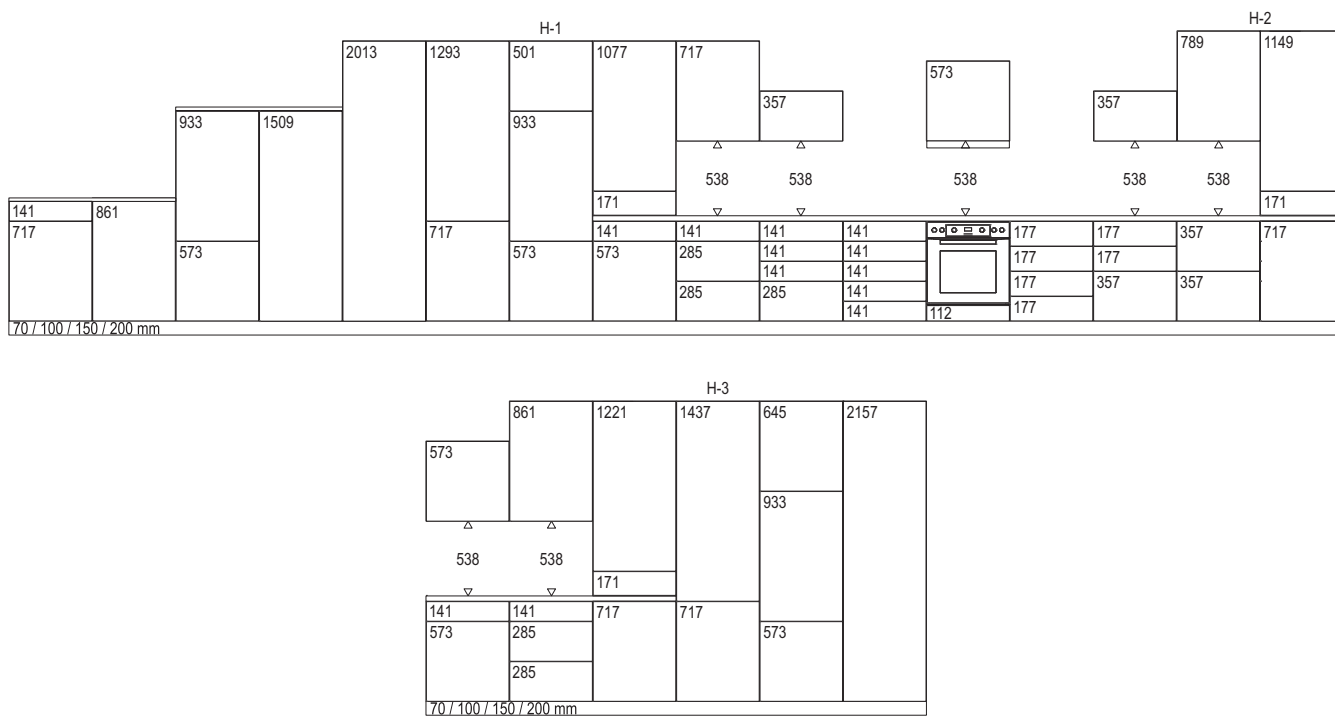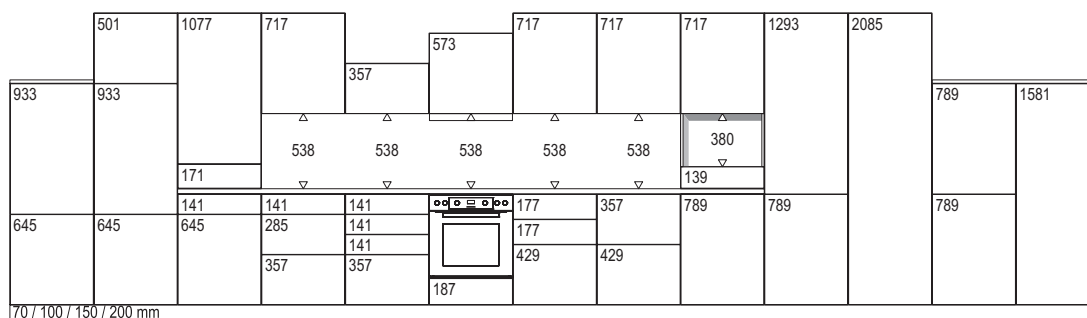
Can be built-in upwards of 450 mm door width.

AS9450

Dimensional drawings | Height grid

Height grid, carcase heights

W-36 | W-58 | W-1 | H-1
360 | 576 | 720 | Highboard
538 | 538 | 538 | 2016
| | | 1512
| | | Maxi-base unit
720 | 720 | 720 | 864
| | | Mini-base unit
| | | 576
70 / 100 / 150 / 200 mm

W-2 | H-2
792 |
538 | 2088
720 |
70 / 100 / 150 / 200 mm

W-3 | H-3
864 |
538 | 2160
720 |
70 / 100 / 150 / 200 mm

Height grid, XL carcase heights

W-36 | W-58 | W-1 | H-1 XL
360 | 576 | 720 | XL-Highboard
538 | 538 | 538 | 2088
| | | 1584
792 | 792 | 792 |
70 / 100 / 150 / 200 mm

W-2 | H-2 XL
792 |
538 | 2160
792 |
70 / 100 / 150 / 200 mm

W-3 | H-3 XL
864 |
538 | 2232
792 |
70 / 100 / 150 / 200 mm

Height grid, standard and maxi door dimensions

H-1

2013 | 1293 | 501 | 1077 | 717
933 | 1509 | | 933 | 357
141 | 861 | | | 538 | 538
717 | | | 171
573 | | 717 | | 141 | 141 | 141 | 141
| | | 573 | 573 | 285 | 141 | 141
| | | | | | 141 | 141
| | | | | 285 | 285 | 141
| | | | | | | 141

573 | 538
177 | 177 | 177 | 112

H-2

789 | 1149
357 |
538 | 538
| 171
177 | 357 | 717
177 |
357 | 357

70 / 100 / 150 / 200 mm

H-3

861 | 1221 | 1437 | 645 | 2157
573 | | | 933 |
538 | 538 | | |
| | 171 | |
141 | 141 | 717 | 717 | 573
573 | 285 | | |
| 285 | | |

70 / 100 / 150 / 200 mm

34

Dimensional drawings | Height grid

Height grid, XL door dimensions, Height 1

501	1077	717		717	717	717	1293	2085

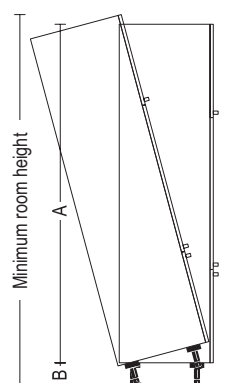## Height grid, XL door dimensions, Height 2
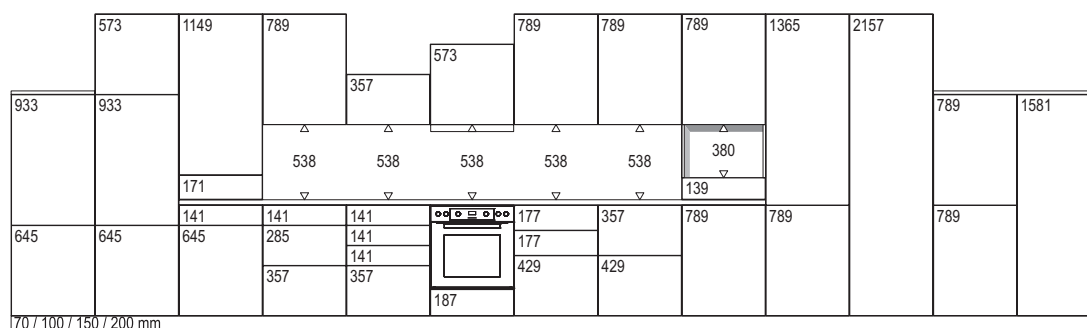
Height grid, XL door dimensions, Height 3
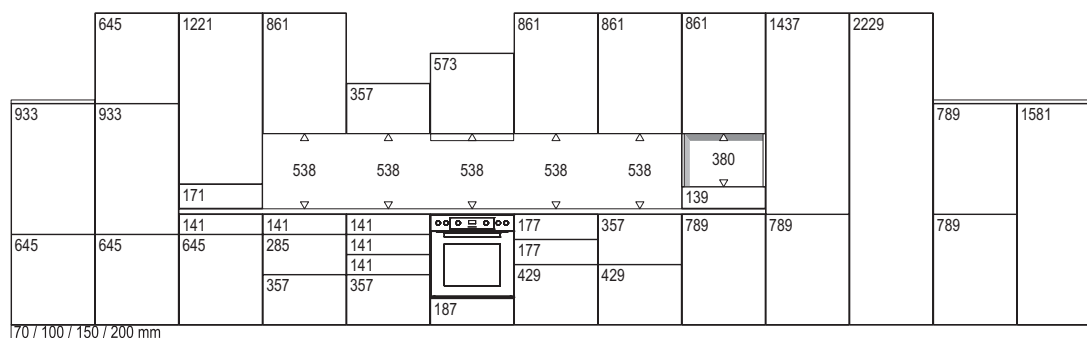
Height grid, tall units

Minimum room heights

A* \ B*	70 mm	100 mm	150 mm	200 mm
2016 mm	2147 mm	2176 mm	2224 mm	2273 mm
2088 mm	2217 mm	2246 mm	2295 mm	2343 mm
2160 mm	2287 mm	2316 mm	2365 mm	2414 mm
2232 mm	2357 mm	2386 mm	2435 mm	2484 mm

A* = Tall unit height
B* = Plinth height